



MX 32

Controller



Presentation

The MX 32 is a compact, low-profile controller that continuously monitors gas detection, including 4-20 mA, dry logic input, MODBUS RS485 signal from compatible detectors.

Features

- Analog and digital controller
- Up to eight detectors
- Fully scalable
- SIL1 reliability



Modules


Different modules can be connected to improve the capabilities of the controller.

4 or 8-relay module



Programmable 4 or 8--relay module can be located closer to the actuators for cost savings.

8-analog-input

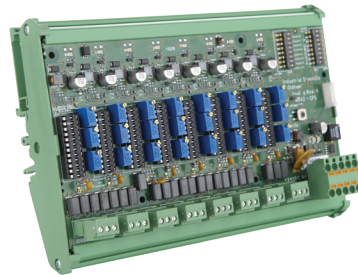

Can connect standard analog transmitters (gas or flame detectors for instance) on a digital line for cost savings.

16-logic-input module



Addressable module of 16 logic input for recovery of digital information such as fire or intrusion alarms, emergency stop, limit switch activation, etc.

4-analog-output



Addressable 4-analog-output module that delivers four analog 4-20mA signal outputs (detector output copy, min, max, average of a group of detectors) for connection to a datalogger, a PLC, a Building Management System (BMS), etc.


5" LCD back-lit graphic display

Smart keys make
embedded multi-language
menus simple to use


Five programmable events
per detector

Lockable toggle latch

MX 32 takes analog and digital inputs and covers all needs for a wide variety of applications.
The MX 32 digital technology allows up to eight detectors to be distributed on two lines for increased cost savings.

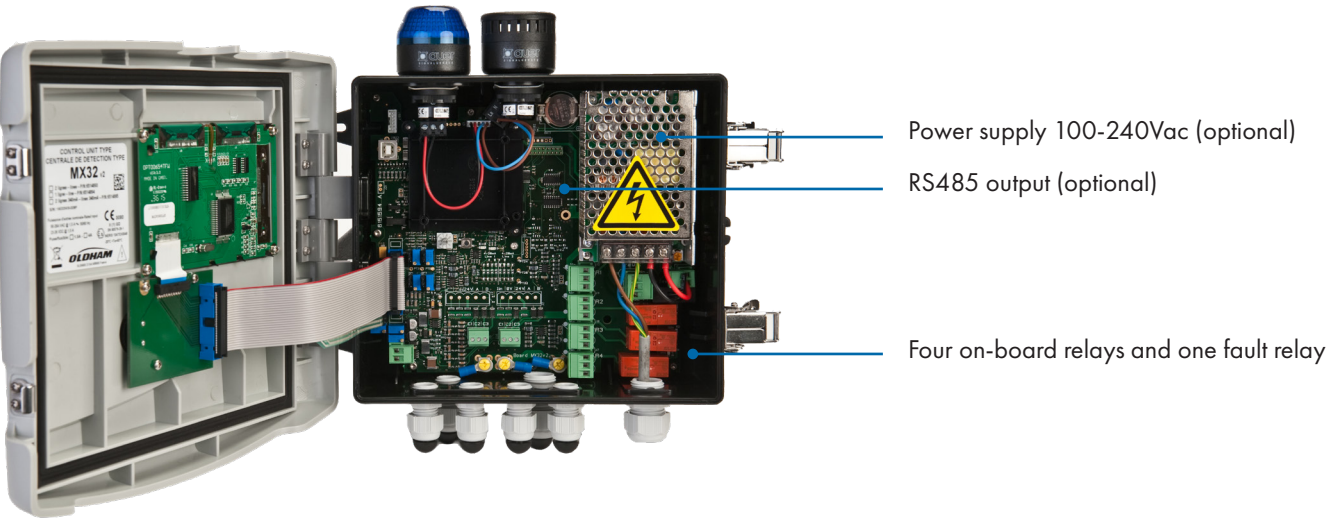


Normal mode

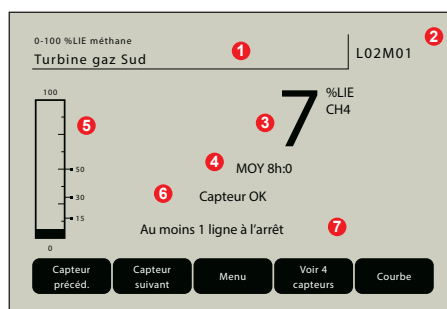

- 1 Measure Range, gas and detector tag
- 2 Detector address
- 3 Current value with unit and detected gas
- 4 Averaged value on the last eight hours
- 5 Bar graph with alarm thresholds
- 6 Detector status (OK, OFF, FAULT)
- 7 MX 32 status information


Alarm mode

Grayscale mode in alarm conditions for immediate identification of the concerned detector.

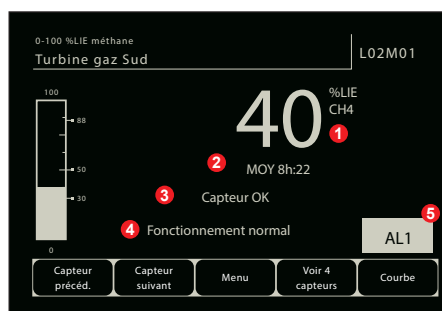

- 1 Current value with unit and detected gas
- 2 Averaged value on the last eight hours
- 3 Detector status (OK, OFF, FAULT)
- 4 MX 32 status information
- 5 Detector in alarm


Simultaneous display of several detectors

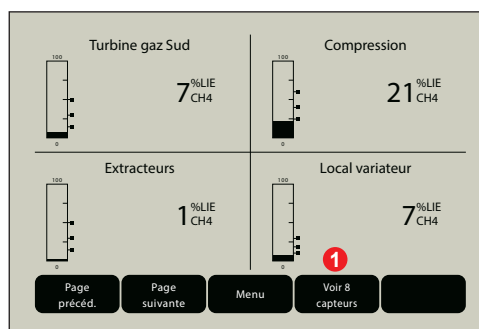

- 1 Up to eight detectors displayed simultaneously

Calibration curve

Simplified procedure that enables time savings (i.e. non-intrusive and one-man calibration).

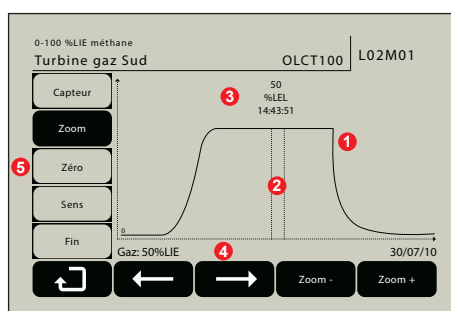

- 1 Calibration curve
- 2 Cursors for span settings
- 3 Measured value
- 4 Calibration gas value
- 5 Detector selection, zeroing and spanning


Data-logging

By default, the MX 32 can store up to 512 alarm events, 512 fault events and 512 system events.

Alarmes gaz					4	64/64			
Turbine gaz Sud	AL1	3	ON	13.01.10	18:22:19				
Turbine gaz Sud	AL2		ON	13.01.10	18:22:19				
Turbine gaz Sud	AL1		OFF	13.01.10	18:22:31				
Turbine gaz Sud	AL2		OFF	13.01.10	18:22:31				
1						2			
Page précéd.		Page suivante		Dernière page		Effacer		Echap.	

- 1 Detector tag
- 2 Event
- 3 Date and time of events appearance or clearance
- 4 Page number (up to 64 pages)

COM 32 configuration software

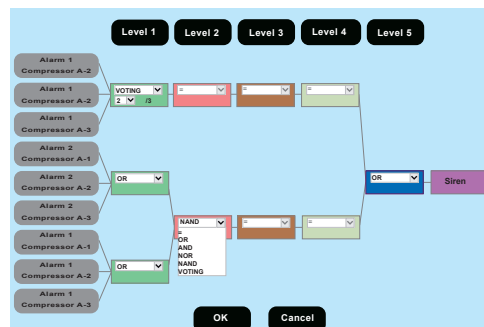

- 1 Simple relay programming
- 2 Up to five embedded functions: OR, AND, NOR, NAND, VOTING
- 3 Multiple timers available
- 4 Advanced management of audible alarms (acknowledgment, reactivation, evacuation)



Ordering information

MX32-A-B-C-D-E-F


Version	Power supply	Language	Strobe and Audible alarm combination	RS 485 serial output	COM 32 software
1- 1 channel 2- 2 channels 3- Wheatstone bridge	1- 24Vdc 2- 100/240Vac	1 - French 2 - English	0- Without 1- Red 2- Blue	0 - Without 1 - With	0 - Without 1 - With (USB cable included)

f.i: MX32-1-2-2-2-1-1 for MX32 1 channel, 100/240Vac, English menu, Blue strobe & horn, RS485 output and COM 32 software

Configuration examples

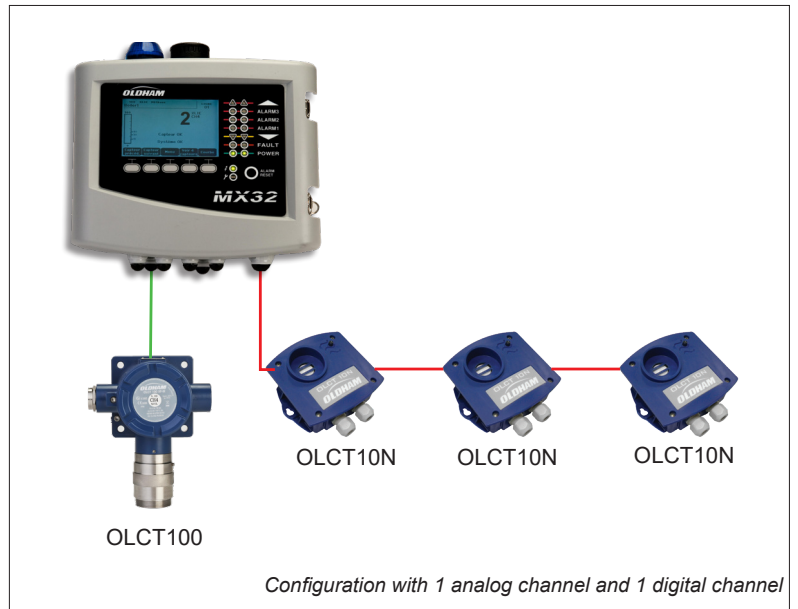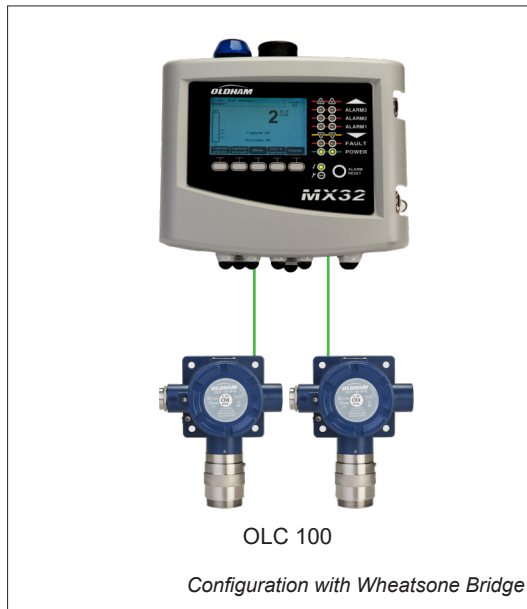

— Analog signal
— Digital signal

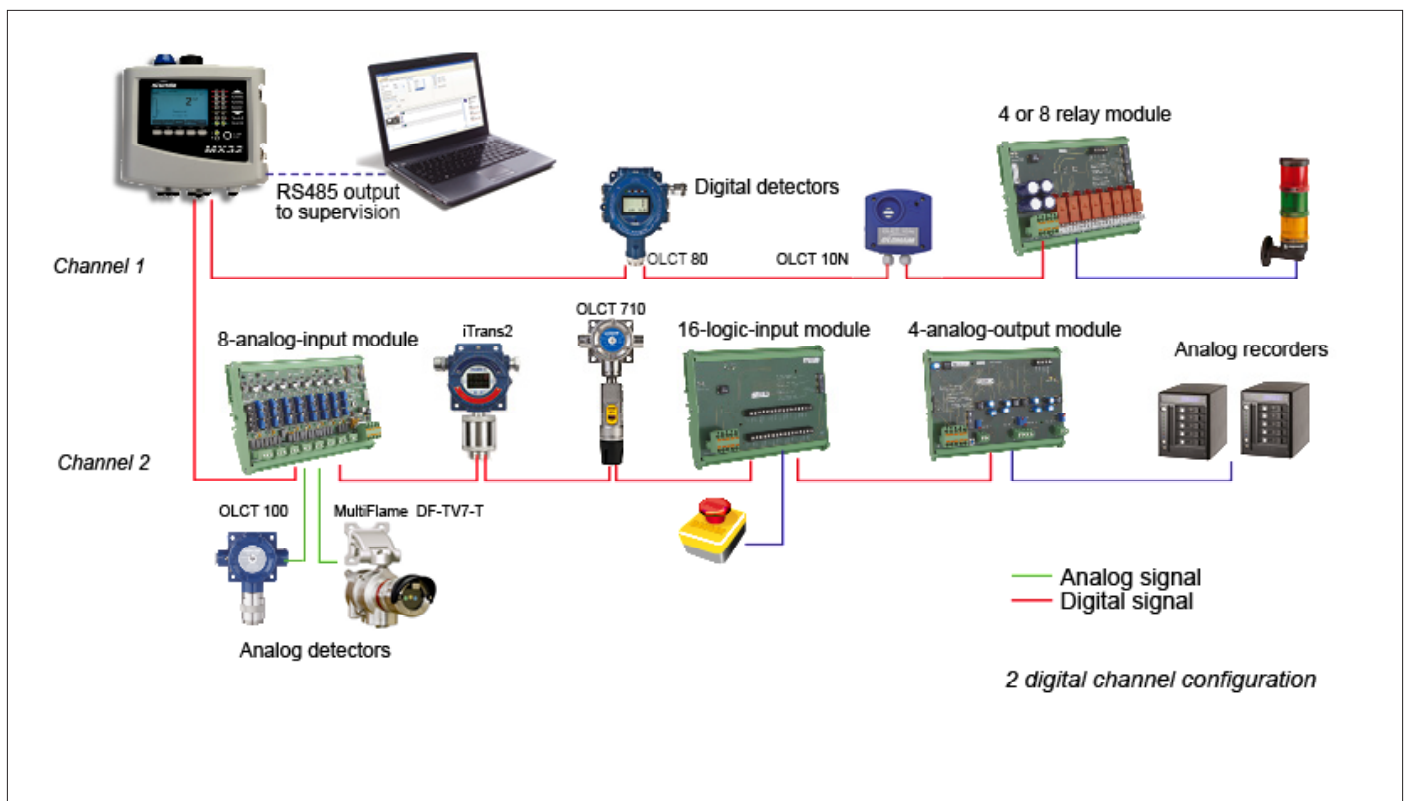

Model		MX 32 gas detection control panel
Dimensions (w*h*d)		265 x 266 x 96 mm (10.4 x 10.5 x 3.8 inches)
Ingress protection		IP55
Cable entries (wall-mounted version)		5 M16 cable glands, 4 to 8 mm ² (8 to 11 AWG) outer diameter cable 2 M20 cable glands, 6 to 12 mm ² (7 to 9 AWG) outer diameter cable
Display		LCD back-lit display + smart keys Display in grayscale mode in case of fault Customizable by user (display 1 to 8 channels simultaneously, fixed or scrolling, on events...) Bar graph with alarm threshold
Visual indicators		7 LEDs per line for Detector status 1 common LED for Fault condition 1 common LED for Power condition
Buttons		5 smart keys 1 audible alarm accept/reset button
Operating use		
Operating temperature		-20°C to +50°C (-4°F to +122°F)
Storage temperature		-20°C to +50°C (-4°F to +122°F)
Humidity		5 to 95% RH
Power input		100-240Vac 50-60Hz (35W) or 22-28Vdc (92W)
Consumption		250mA max. (without module or detector)
Measurement lines		
Digital lines		2 maximum RS-485 communication, proprietary protocol, 9600 Baud 2 twisted shielded-pair cable
Analog channels		2 maximum (4-20mA or Wheatstone Bridge) 0-23mA analog signal input (4 to 20mA reserved for measurement) or OLC 10, OLC 10Twin and OLC 100 flammable gas detectors (Wheatstone bridge type) 120 Ohm load resistance 2 or 3 core shielded cable depending on detector
Maximum current output per line		0.42A (@ 50°C) to 1A (@ 30°C) with internal AC power or 1.5A with external DC power
Maximum current output for the 2 lines		0.42A (@ 50°C) to 1A (@ 30°C) with internal AC power or 2x1.5A with external DC power
Alarms		
Per channel		5 Alarm levels (A1, A2, A3, Overscale, Underscale) + 1 Fault Catalytic bead over range protection Programmable thresholds on instantaneous or averaged values, rising or falling alarms, manual or automatic acknowledgement
Output		
On-board relays		4 fully programmable alarm relays + 1 fault relay (non-configurable) Dry contact relay, DPCO relays, contact rating 5A / 250 Vac - 30Vdc
External relays		Up to 16 fully programmable alarm relays Dry contact relay, DPCO relays, contact rating 5A / 250 Vac - 30Vdc
Digital outputs		RS-485 Modbus RTU
Analog outputs		Up to 8 outputs (4-20mA)
Approvals		
EMC		According to EN 50270:15
Low voltage directive		According to EN 61010-1:10
ATEX		Metrological performances according to EN 60079-29-1:2016 and EN 50271:10
CSA		CAN/CSA-C22.2 No. 0-10; CAN/CSA-C22.2 No. 61010-1-12; UL Std. No. 61010-1 (3rd Edition)
Functional safety (reliability data)		SIL1 capability according to EN 50271:2010 du = 1,60 to 1,80. 10-6, PFDavg=7,10 to 8,02. 10-3, Ti=1 year, MTBF=25 to 28 years, SFF 60%



TELEDYNE OLDHAM SIMTRONICS
Everywhereyoulook™



Teledyne Oldham Simtronics quality assurance programmes demand the continuous assessment and improvement of all our products. Information in this leaflet could thus change without notification and does not constitute a product specification.



TELEDYNE
GAS AND FLAME DETECTION
Everywhereyoulook™

AMERICAS

4055 Technology Forest Blvd.
The Woodlands, TX 77381
USA.
Tel.: +1-713-559-9200
Fax: +1-713-893-6729

EMEA

ZI Est, Rue Orfila,
CS 20417
62027 ARRAS CEDEX, France
Tel.: +33-3-21-60-80-80
Fax: +33-3-21-60-80-00

ASIA PACIFIC

Room 2722,
No. 51 Jinzang Road
Shanghai Free Trade Zone
China
Tel.: +86-134 8229 5057